

CopperTen™ Solutions

The Future of UTP



Introduction

Although UTP cables have existed in one form or another for decades, they have only been used in data communications networks for just over ten years. While data cables existed in different forms for several decades before UTP cables were predominantly used, they were quickly replaced by UTP cables for several reasons.

Coax and shielded cabling solutions, such as ThickNet, ThinNet and IBM type 1, were very good cables for transmitting data within Local Area Networks (LANs). With the advent and proliferation of computer networking technologies, more and more cables occupied spaces "behind the scenes" where cables had only existed for telecommunications purposes in the past. Telecommunications rooms were expanded to allow for connectivity between networking devices (hubs), servers and workstation terminals. Data rates were on the order of 1 to 16Mbps and ran on proprietary cabling solutions. Several protocols existed for proprietary to somewhat standardized networks, such as Token Ring, ISDN and ATM.


Why UTP?

Space, time and cost constraints led to the development of a more cost effective medium for transmitting data in UTP cables. By eliminating the need for shielded solutions, the end user now needed less space for installation, and saved money on materials and labor for installation. Grounding issues were also mitigated. Most importantly, UTP solutions are used as a baseline interoperability media for the most prevalent protocols.

In most cases a cabling solution is developed to support a faster transmission protocol. Today's fastest protocol over UTP cable is 1000BaseT transmission. This is supported by both Category 5e and Category 6.


UTP and the End of the Protocol Debate

To better understand why UTP cable has evolved from Category 1 to Category 6, we must first understand the primary driver, i.e., data rate progression. In the early 1990s, ATM, Token Ring and Ethernet were in contention in a race to determine which protocol would become the industry standard for LAN applications. By the mid 1990s, Ethernet had come out on top. It provided a highly accessible technology with an outstanding cost basis that ultimately proved to provide the "QoS" needed at the right price. In addition, the progression to 100Mbps transport assured that the data rates would be sufficient to support the needed bandwidth for existing and up-and-coming applications.

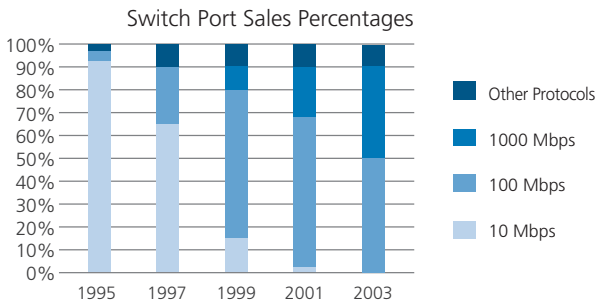

The previous chart provides a good example of the progression of Ethernet as the default standard for today's LAN applications. As evidenced from the chart, 10Mbps was the largest market share holder in 1995. By 1999, 100Mbps had almost gained as much market share as 10Mbps protocol. 2003 saw the demand for 10Mbps completely dissipate. Currently, the market is split between 100Mbps and 1000Mbps, with 100Mbps quickly on the decline.

Note: The "Other Protocols" in the first chart comprise 10 percent of the market consistently over the last six years. These protocols are legacy systems, such as Token Ring and ATM, and/or security systems.

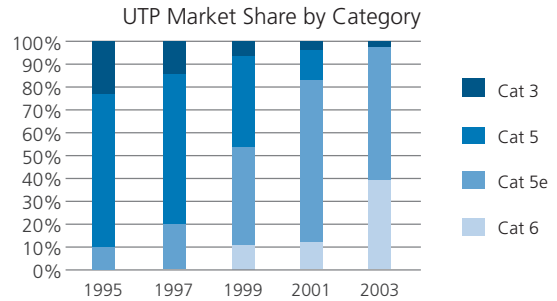

The second chart above shows how historically the cabling category installed has always led well before the protocol speed supported is used. For example, in 1995, the primary UTP cabling being installed was Category 5, which could support 100Mbps, but the switch ports sold that same year were primarily 10Mbps. In 1999, the primary switch port speed sold was 100Mbps, but the primary cabling solutions, Category 5e and Category 6, supported 1000Mbps.

What this data tells us is that the cabling installed always leads the primary data rate. This was the case until 2003. Today our fastest data rate is 1000Mbps over UTP. The cabling being sold today is only capable of supporting 1000Mbps. Customers will want a cabling solution that will support the next generation leap in data transmission, 10Gbps.

UTP Cable Categories by Protocol Supported to a Minimum 100M Length

Category	POTS	ISDN	Token Ring 4Mbps	10BaseT	Token Ring 16Mbps	100BaseT4	100BaseTX	ATM 155	ATM 622	1000BaseT	10GBaseT
1	X	X									
2	X	X	X								
3	X	X	X	X	X*	X					
4	X	X	X	X	X	X					
5	X	X	X	X	X	X	X	X			
5e	X	X	X	X	X	X	X	X	X	X	
6	X	X	X	X	X	X	X	X	X	X	

*Active "powered" equipment only.



Why do I need Category 6?

Originally Category 6 was developed to support a more cost effective way of running 1000Mbps, by using two pairs within the cable instead of all four. This is the same way we currently run 100BaseTX and the reason that 100BaseT4 never caught on. This would cut the cost of transceivers within the active hardware. At the time, a leader in the telecommunications industry was developing the hardware/protocol in question and needed a cable that would extend the frequency bandwidth used from the current 1-100MHz out to 250MHz. This allowed for higher bandwidth potential.

At the same time the development of four pair transceivers using PAM5 encoding supported 1000BaseT over Category 5e cables. These transceivers weren't as costly as initially expected. Today we see workstation PCs shipped with 10/100/1000BaseT NICs integrated directly on motherboards. Switch prices have come down substantially and copper remains the most economical way to run Gigabit with the LAN.

1000BaseT transmission was being embraced as the latest, greatest protocol technology. Both Category 5e and Category 6 cables were being sold to support it. That's right, Category 5e and Category 6 both support up to 1000BaseT (Gigabit) Ethernet transmission protocol.

An argument has been made for installing Category 6 over 5e. Category 6 does give a much better signal to noise ratio than 5e, at all frequencies. This allows for anomalies within the active hardware that might otherwise cause a greater number of errors on a lesser performing 5e cabling system. Category 6 does support broadband video applications to a greater extent as well. However, Category 6 doesn't support any additional protocols up to 100 meters that 5e doesn't. At the same time, the extended frequency to 250MHz of Category 6 also gave the customer a certain level of "future proofing." Or did it? The industry seemed to adopt Category 6 with an attitude of "build it and the protocol will come." The Telecommunications Industry Association (TIA) has since ratified Category 6 and now that the cable has been standardized, the question still remains, "Did it meet expectations?"

What is the Next Leap?

The active hardware manufacturers and the IEEE are key to understanding where the cable needed to go. The TIA must then respond by supporting the IEEE with a cabling standard.

Each leap in Ethernet has meant a tenfold increase in data transmission throughput, i.e. 10 – 100 – 1000Mbps. The next logical step would then be to meet 10Gbps, which is already supported by fiber. The IEEE P802.3 10GBASE-T study group was then formed to investigate ways of running the new transmission speeds.

It quickly became evident, through interaction with the active hardware manufacturers, that Category 5e wasn't going to support the needed electrical requirements for the distance. Category 6, it turns out, didn't make the grade either. Its electrical characteristics are tuned to a knife's edge, to say the least, and we still couldn't support the next wave of transmission to the expected 100 meter distance. The study group is looking at limited length runs to support 10Gigabit over Category 6 up to 55 meters, but that's a far cry short of the magic 100 meter mark.

What Cable Will Support the Future?

All along we thought that the pair-to-pair relationship within the cable was paramount to making good cable. Then came the "A" word – Alien Crosstalk. Did that mean aliens were trying to corrupt our data? Not exactly. Alien crosstalk is the noise heard on a pair within a cable, generated by another cable directly adjacent to it. The active community are worried about random events or events that are unpredictable. While the noise between pairs within a cable can be predicted and eliminated within the active hardware, unpredictable alien crosstalk cannot.

This raised the bar yet again, but this time for a reason. The actives now need a better cable to proceed. Limits have been established and testing commenced to understand what is needed from the UTP realm to achieve the goal of 10Gigabit transmission over 100 meters.

Through innovative thinking, KRONE Group engineers were the first to achieve the necessary performance to support 10Gigabit all the way out to 100 meters, with the new CopperTen™ solution. The results for the new cabling innovation were presented at the November 2003, meeting of the IEEE P802.3 10GBASE-T working group with a vote of 64 to zero to move forward. Alien crosstalk performance can now be achieved, as well as the needed insertion loss levels, for transmission over the full-length requirement.

What does this mean to the Industry?

Now that it has been proven that a UTP cable and connectivity can achieve the needed electrical parameters, the active hardware manufacturers can develop their components/protocols. Copper will again support LANs to the next level of transmission performance and match the current highest speed offered by fiber, in 10Gigabit. LANs will once again be future-proofed today for the protocol of tomorrow, all at a better price.

With the CopperTen solution now a reality, consumers have three options: install a cabling solution that supports today's protocols by using Category 5e; implement tomorrow's protocol, 10Gigabit, to a limited length of 55 meters by using Category 6; or support tomorrow's protocol to the full 100 meters with CopperTen cable.

KRONE's revolutionary CopperTen solution is now part of ADC's TrueNet®, structured cabling solution, the integrated portfolio of high-performance copper and fiber cable, connectivity and cable management products from ADC and KRONE. The precisely tuned TrueNet system uniquely exceeds TIA/EIA standards and provides a clear path for uninterrupted data throughput throughout the network.

To learn more about both the CopperTen and TrueNet solutions, please visit:
<http://www.adc.com/productsandservices/product/solutions/truenet/>



Web Site: www.adc.com

From North America, Call Toll Free: 1-800-366-3891 • Outside of North America: +1-952-938-8080
Fax: +1-952-917-3237 • For a listing of ADC's global sales office locations, please refer to our web site.

ADC Telecommunications, Inc., P.O. Box 1101, Minneapolis, Minnesota USA 55440-1101
Specifications published here are current as of the date of publication of this document. Because we are continuously improving our products, ADC reserves the right to change specifications without prior notice. At any time, you may verify product specifications by contacting our headquarters office in Minneapolis. ADC Telecommunications, Inc. views its patent portfolio as an important corporate asset and vigorously enforces its patents. Products or features contained herein may be covered by one or more U.S. or foreign patents. An Equal Opportunity Employer

1314739 01/05 Original © 2005 ADC Telecommunications, Inc. All Rights Reserved